



HT-25

Next Generation Dual Sanitizer Mode Ware Washer

Increase your warewashing capacity without expanding your kitchen.

STANDARD FEATURES

- Wash, rinse, and sanitize in as little as 60 seconds
- Fastest in the industry
- Powerful 3 HP pump
- · Scrubs away what other machines leave behind
- Low water usage only 0.85 gallon per rack
- Approved dual sanitizer same machine serves as either high* or low temp
- Versatile door design installs corner or straight

The features of the HT-25 eliminate re-washes. A powerful design with powerful results!



Available with

Stainless Steel Built-on Booster.





HT-25

Next Generation Dual Sanitizer Mode Ware Washer

Standard Features

- 60 second cycle time
- Patented self cleaning spray system
- · Auto fill and auto shut off
- Two stage ss drain filter eliminates clogged pumps
- Powerful 3 HP wash pump
- 18" door opening

- Ads patented low-water protection
- Patented captive spray arm end caps - no parts to lose
- · Configured for corner or inline installs without conversion
- No troublesome circuit boards prevents down time



Model HT-25 Specifications

U.S. REGISTERED PATENTS

	Hot Temp	Chemical
Rated Capacity (Racks/Hr.)	55 NSF rated	55 NSF rated
Wash Tank Capacity 1		
Water Temperature, Wash		
Water Temperature, Rinse 1	80.0° F (82.2° C)	120.0° F (48.8° C)
Sanitizer	180.0° F	50 PPM Chlorine
Water Consumption		.85 GPR (3.593 LPR)
Wash Motor		
Electrical Requirements		
(4-Wire Connection	, Three #8 Wires, 0	Ground, 40A Breaker)

SINGLE PH, 208/240V, 90A, 60 Hz


(Dual Circuit: 30A Breaker, 60A Breaker, Neutral & Ground Wires)

COMBO OPTION: HT-25/34 W/Attached 12 kw Booster(3ph Only) (4-Wire Connection, Three #8 Wires, Ground, 50A Breaker, Single-Point

Connection of Both the D/M & Booster)

NOTE: FOR HIGH TEMP SANITATION, A SEPARATE BOOSTER IS **REQUIRED FOR THIS MODEL**

Wash Heater
Rack Size 19-3/4" X 19-3/4" (50.2 Cm X 50.2 cm)
Door Clearance
Water Inlet(1)
Drain Size
Height (All Doors Closed) 74" (187.96 cm)
Width, Table To Table (Inline Model) 25" (63.5 cm)
Width W/Scrap Accumulator (Overall) 37" (93.9 cm)
Depth (Overall)
Shipping Weight (STD/BoBooster)
Shipping Dimensions
(124.5 cm X 91.4 cm X 208.3 cm)

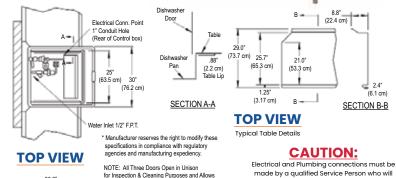

for Inspection & Cleaning Purposes and for Inline or Corner Applications without Conversion Proceedures. comply with all available federal, state, and local Health, Electrical, Plumbing, and Safety Code Doors and Control Box 86.3" Open Overall Height 219.2 cm (53.6 cm) Clearance 18" (45.7 cm) (187.9 cm) 57.8" NOTE: Probe & Chemical

(85.1 cm)

Adjustable Fee **SIDE VIEW FRONT VIEW**

*Requires external hot water source that will provide at least 47 gallons of 180 degree water an hour

Installation 7

Effective 2/2023

All dimensions listed have a tolerance of + or - 1/8" unless otherwise noted.

Warning: Cancer and Reproductive Harm - www.P65Warnings.ca.gov