



CHEMICAL SANITIZING SINGLE RACK CORNER DISHWASHER

C

Low Temperature
Corner Dishwasher



FEATURES

- 40 racks / 160 covers per hour.
- All stainless steel construction assures long life and years of trouble free operation.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps.
- Top mounted controls include built-in chemical pumps and deliming system that assures proper chemical usage.
- Auto start/stop makes operation safe and easy.
- Integrated scrap tray prevents food soil from entering drain system.
- Water inlet comes with built-in strainer, prevents debris from clogging the water valve.
- Dishmachine comes with 2 dishracks.
- Stainless steel impeller offers extended life and service.
- Stainless Steel scrap tray, long lasting.

CMA MODEL: C

AVAILABLE OPTIONS


- Temp-Sure heater assures a continuous supply of 140°F hot water that guarantees excellent results. Requires a separate 208-240V 3 phase 40 amp power supply.
- Low Chemical Alarm
- Stainless Steel Dishtables
- Alternative Cycle Times
- Alternative Electrical Available
- Slant shelf 21"X42"
- Stainless Steel Scrap Trap in lieu of Poly Pro



Solid/Powder Dual Bowl Option Dispenser. Bowl option available for capsule dispensed products.



Unique pull-pin design allows wash arms to be easily removed for cleaning.




Pump purging system improves results by eliminating soil and chemical carryover during rinse cycle.



C
**Chemical Sanitizing
 Single Rack
 Corner Dishwasher**

WARNINGS:

- Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.
- CMA recommends utilizing a water softening system to maintain water hardness measurements of 3.5 gpg (grains per gallon) or less. This will assure maximum results and optimum operation of the dishmachine.

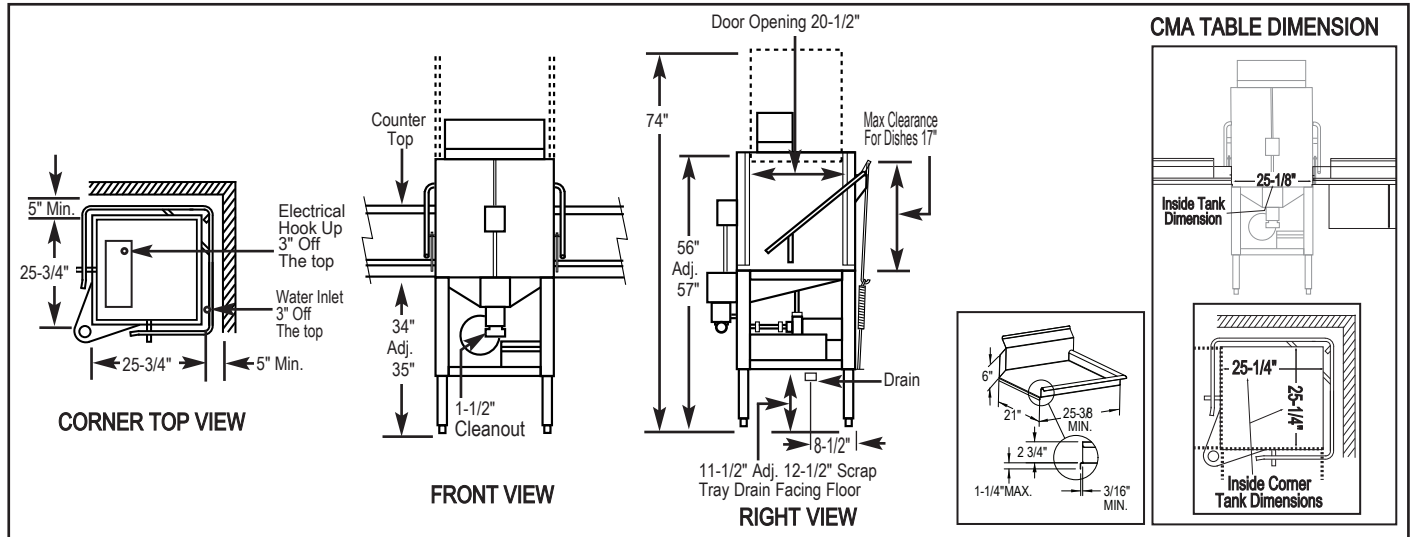

Specifications:

MODEL C	USA	METRIC	USA	METRIC
OPERATING CAPACITY RACKS PER HOUR (NSF RATED)	40	40	WASH PUMP MOTORS HP	1
OPERATING CYCLE WASH TIME-SEC	45	45	DIMENSIONS DEPTH	25-3/4" (65.4cm)
RINSE TIME-SEC	30	30	WIDTH (OUTSIDE DIMENSION)	25-3/4" (65.4cm)
DWELL TIME-SEC	15	15	HEIGHT	56"-57" (142.2cm-144.8cm)
TOTAL CYCLE TIME	90	90	STANDARD TABLE HEIGHT	34" (86cm)
WASH TANK CAPACITY	1.7 GAL.	(6.45 L)	MAXIMUM CLEARANCE FOR DISHES	17" (43cm)
PUMP CAPACITY	52 GPM	(197 LPM)	STANDARD DISHRACK	1
OPERATING TEMPERATURE REQUIRED	120°F	(49°C)	DIMENSIONS	20" x 20" (50.8 x 50.8cm)
RECOMMENDED	140°F	(60°C)	ELECTRICAL RATING	VOLTS 115 AMPS 16
WATER CONSUMPTION PER RACK	1.7 GAL.	(6.45 L)	APPROXIMATE SHIPPING WEIGHT	269# (122.kg)
PER HOUR	68 GPH	(257 LPH)	SHIPPING DIMENSIONS	PALLET & BOX @ 41" X41" X 66"
WATER REQUIREMENTS WATER INLET	3/4"	(1.9cm)		
DRAIN-I.P.S.	2"	(5.1cm)		

Summary Specifications: Model C

CMA Energy Mizer model C low temperature, chemical sanitizing commercial dishwashers meet NSF, UL and construction standards WITHOUT the use of BOOSTER or TANK HEATERS. The model C is constructed entirely of stainless steel. Each unit automatically washes, rinses and sanitizes food service utensils in standard 19-3/4" x 19-3/4" racks. Unit comes standard with upper and lower stainless steel wash arms. The model C incorporates a pump purging system that improves results by eliminating soil and chemical carryover during rinse cycle. **Note: These machines do not have built-in heaters, therefore produce no steam.**

Advisory: CMA does NOT endorse "Tankless On-Demand" water heaters for use on CMA Dishmachine products. CMA DOES endorse, and highly recommends, the standard "tank" style water heaters, sized properly to handle each particular facility with their water heating requirements.



www.alco-chem.com

NORTH: 45 N Summit Street, Akron, OH 44308 | Hours: M-F, 8:00-4:30 | PH: 330.253.3535 | 1.800.589.2526

SOUTH: 1303 Park Avenue SW, Canton, OH 44706 | Hours: M-F, 8:00-4:30 | PH: 330.833.8551 | 1.800.437.5248